



CHETO[®]

CNC DEEP HOLE DRILLING WITH MILLING

www.cheto.eu

CHETO

DB Series 6 Axes




OUR PRODUCTS & DESIGN



INL MODEL

BTA / GUNDRILL


up to **3** Axes

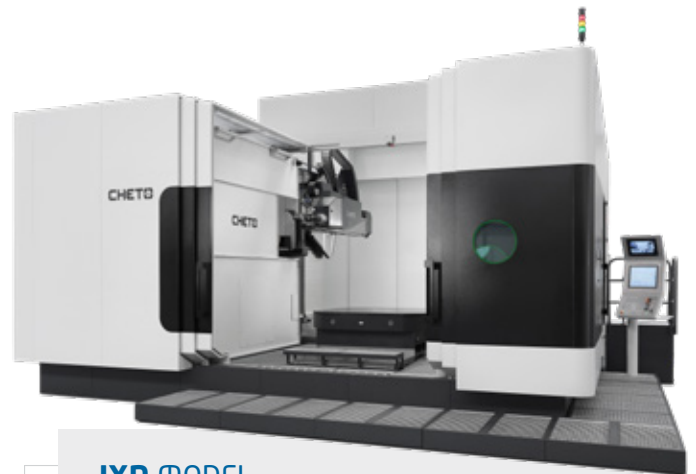

IXN MODEL

1000 / 2000 / 3000 / 4000

6 & 7 Axes

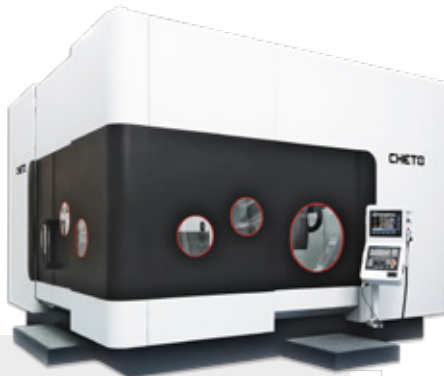

PWN MODEL

1000 / 2000 / 3000

5 Axes



CSHI MODEL

Versions 4.0 / 9.0



SiC MODEL

650 / 1000 / 1000 HD

6 Axes with Gun Drill Arm

- Efficient **Deep Hole Drilling** with **Milling** for **Small Size Parts**
- Working **5 Faces** on a **Single Setup**
- **3+2** milling / **5 axes**
- **No Angle Limitation**


Location

CHETO TECHNOLOGICAL CENTER:

Área de Acolhimento Empresarial
UI-Loureiro, Lotes 13-21
3720-070 Loureiro, Oliveira de Azeméis
Portugal
GPS: 40°48'00.5"N | 8°30'35.3"W

CONTACT US

T. +351 256 247 970
E. info@cheto.eu

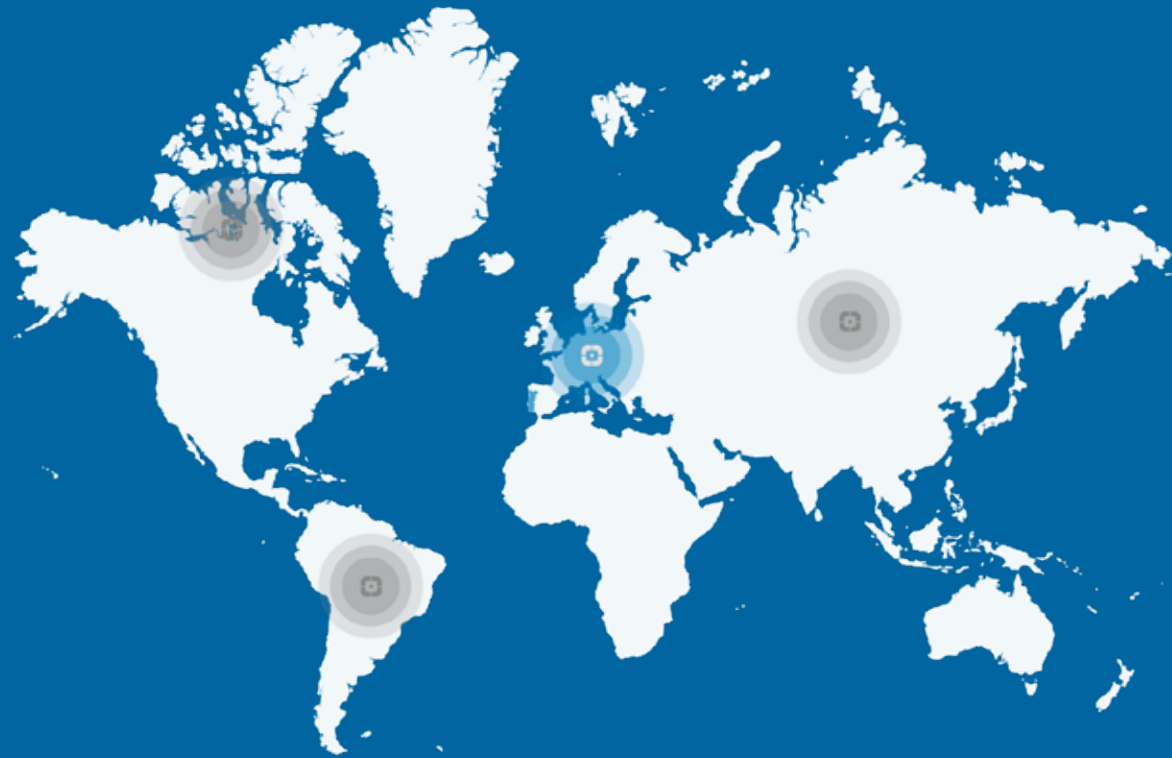

WORLDWIDE PRESENCE

DEEP SOLUTIONS
INNOVATIVE CONCEPT
TO OPTIMIZE
DEEP HOLE DRILLING,
STANDARD DRILLING
AND MILLING



inovadora'21



CHETO®


CNC DEEP HOLE DRILLING WITH MILLING

INNOVATIVE --- machine tools

CHETO was officially established in 2009, when the founders started a project to fully develop a deep hole drilling and milling machine-tool up to 7-axis, specialized for the mold making and energy industry.

Since then, a continuous improvement and investigation allowed CHETO to offer the market a versatile product with high levels of accuracy and reliability.

This concept quickly positioned CHETO as a world-renowned brand. With machines sold in four continents, it is our goal to keep improving and innovating, to offer a highly competitive and value-creating product.

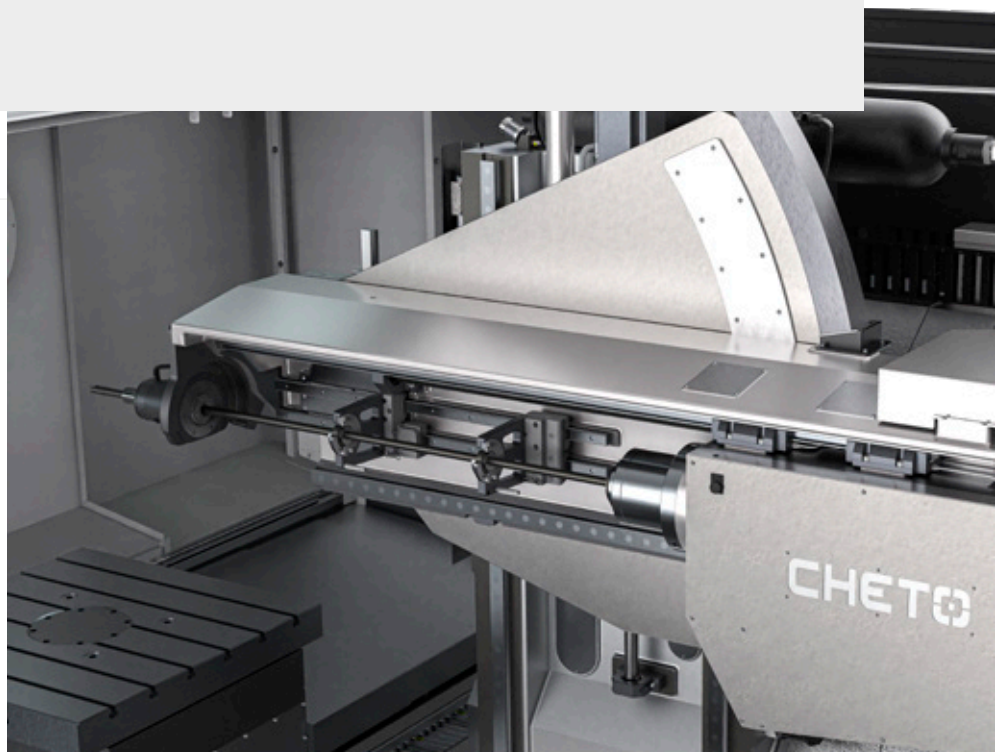



Milling Configuration



Deep Hole Drilling Configuration

DBA

DBB

CNC Axis

W drilling stroke	1550 mm	61.0 in
X longitudinal travel	1250-1800 mm	49.2-70.9 in
Y vertical travel	900 mm	35.4 in
Z cross travel	800 mm	31.5 in
B table rotation	360,000	
A tilting rotation	+25°/-15°	

W drilling stroke	1550 mm	61.0 in
X longitudinal travel	1250-1800 mm	49.2-70.9 in
Y vertical travel	900 mm	35.4 in
Z cross travel	800 mm	31.5 in
B table rotation	360,000	

Drilling capacity

Max. drilling stroke W+Z	1550+800 mm	61.0+31.5 in
Drilling capacity	Ø4-25 mm	Ø0.16-0.99 mm

Max. drilling stroke W+Z	1550+800 mm	61.0+31.5 in
Drilling capacity	Ø4-25 mm	Ø0.16-0.99 mm

Milling capacity

Milling	250 cm ³ /min	15.3 in ³ /min
Rigid tapping	M20	
Helical threading	Standard	

Milling	250 cm ³ /min	15.3 in ³ /min
Rigid tapping	M20	
Helical threading	Standard	

Spindle*

Spindle taper	ISO50 / BT50 / CAT50	
Speed	0-6000 rpm	
Power	11 kW	14.8 hp
Torque	96/132 Nm	70.8/97.4 ft-lbs

Spindle taper	ISO50 / BT50 / CAT50	
Speed	0-6000 rpm	
Power	11 kW	14.8 hp
Torque	96/132 Nm	70.8/97.4 ft-lbs

Automatic rotary table

Table size	1000x1000 mm	39.4x39.4 in
Resolution	0,001°	
Max. load in rotation	5 Ton	11,200 lbs

Table size	1000x1000 mm	39.4x39.4 in
Resolution	0,001°	
Max. load in rotation	5 Ton	11,200 lbs

Layout dimensions

Total weight	18 Ton	40,320 lbs
Foot print (WxL)	5993x6455 mm	235.9x254.1 in

Total weight	17.5 Ton	39,200 lbs
Foot print (WxL)	5993x6455 mm	235.9x254.1 in

DB Series 1250 | 1800

— 6 AXES



STANDARD EQUIPMENT

- CNC HEIDENHAIN TNC 640
- CNC FAGOR 8065 as optional equipment
- Electronic handwheel
- Digital drives
- Encoders in linear axis X, Y, and Z
- Angular encoders in rotating axis A and B
- Positioning table with continuous movement controlled with servo motor
- 3+2 milling / 5 axes
- External status led indication
- High-pressure pump up to 90 bar, 70 l/min | 1,305 psi, 18.5 gal/min
- Machine prepared to use emulsion or oil
- Coolant tank with automatic filtering
- Pumps for oil recirculation
- Automatic chip conveyor
- Quick change between drilling/milling
- Rigid tapping
- Complete cover with doors
- Spindle HSK63 (11.620rpm) as optional equipment
- ATC 40/80 tools, L=600 mm | 23.6 in for Spindle HSK63 as optional equipment
- ATC 32/50 tools, L=600 mm | 23.6 in for Spindle ISO50/BT50/CAT50 as optional equipment



DB OPTIONAL EQUIPMENT



ADAPT MACHINING PARAMETERS ONLINE

- Spindle torque
- Feed
- Coolant pressure
- Coolant flow
- Vibration



TWO CONTROL OPTIONS



INTERSECTION

The system automatically detects intersections in the process and sets the parameters accordingly to keep the quality of the operation and to protect the tool lifetime.

PROCESS

The system detects variations of the efforts of the process and automatically adjust the drilling parameters online to keep a continuous process.




INTERFACE REQUIREMENTS

HEIDENHAIN
TNC 640

SIEMENS
SINUMERIK ONE

FAGOR
CNC 8065

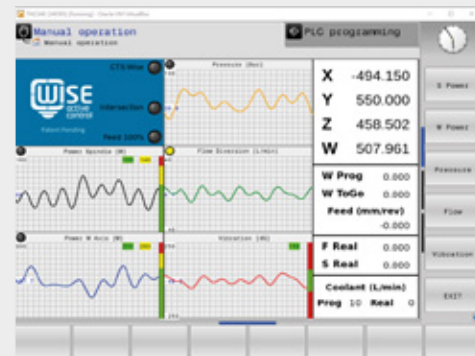

END OF
EXTRAORDINARY COSTS




END OF EXTRAORDINARY COSTS OF NONCONFORMANCE

The diversity of operations, the lack of raw materials homogeneity, the deficient parameter settings, and intersection holes often lead to the reduction of the tool lifetime. As hole intersections are a constant matter on mold making, and considering the difficulty of these operations, it's common to have problems on final results as unexpected hole drifts, premature tool wear or tool break.

DB OPTIONAL EQUIPMENT*



*LASER MEASURING SYSTEM
BLUM LC50



*ELECTRIC PROBE
BLUM TC60




*TOOL CABINET




*CHETO RE100
GUNDRILL GRINDER Ø5-32 mm | Ø0.2-1.26 in

SPINDLE




ISO50 / BT50 / CAT50
Spindle Power / Torque Diagram

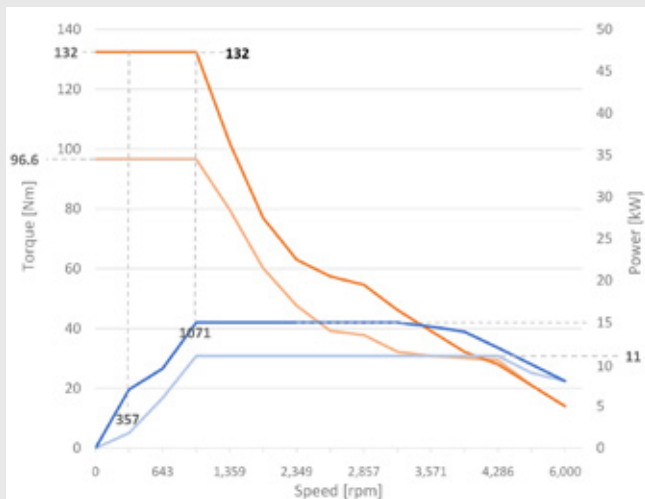

*HSK63 (optional)
High Speed Spindle
Power / Torque Diagram

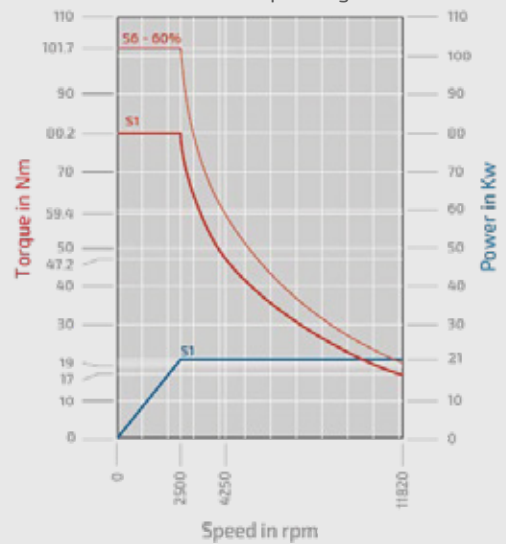

FOOT PRINT DB Series

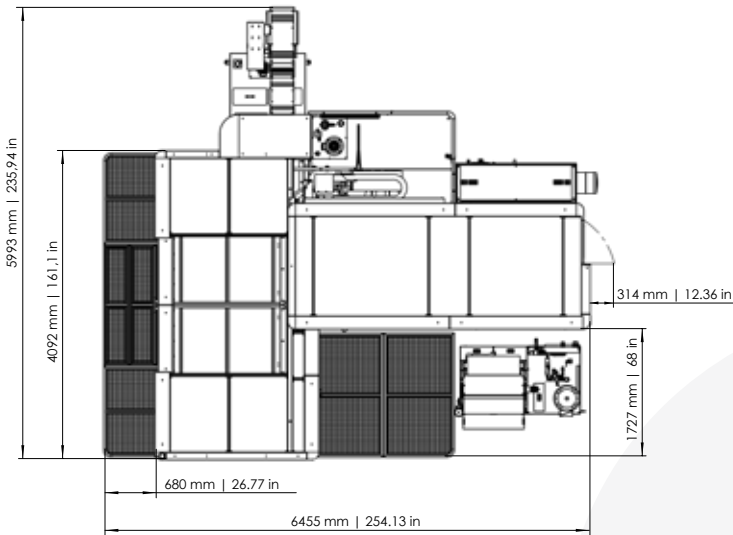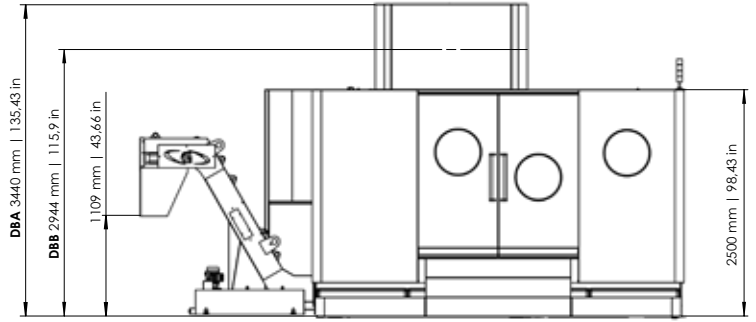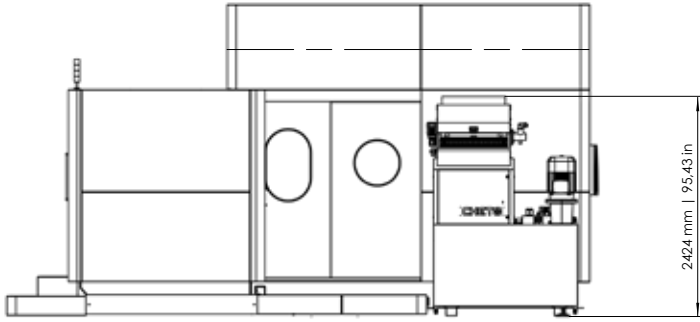

Subject to technical change without notice



CHETOCORPORATION, S.A.

Área de Acolhimento Empresarial
UI-Loureiro, Lotes 13-21
3720-070 Loureiro, Oliveira de Azeméis
Portugal

GPS: 40°48'00.5"N | 8°30'35.3"W
T. + 351 256 247 970

www.cheto.eu
info@cheto.eu

